

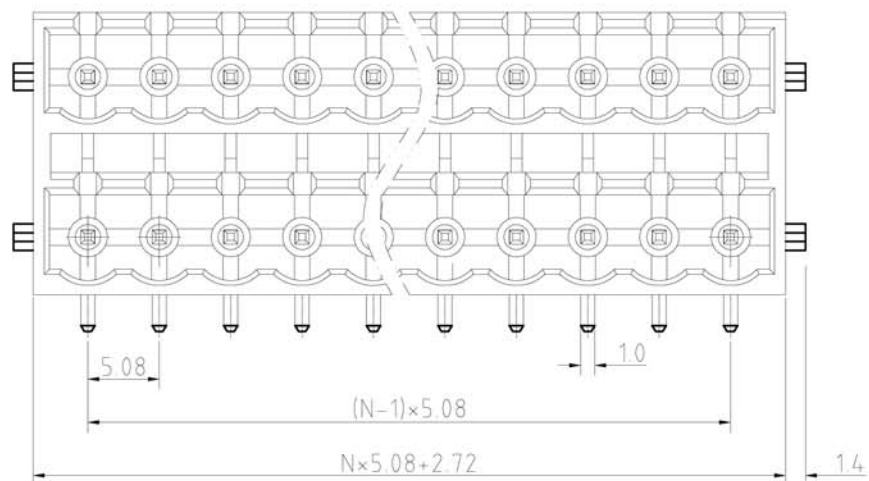
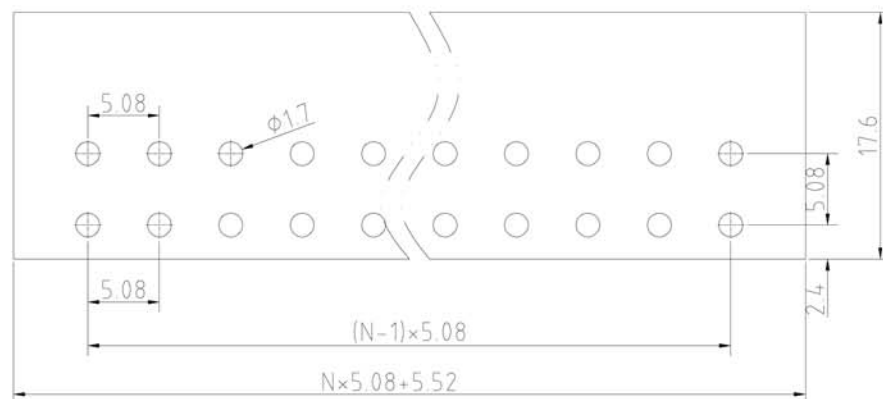


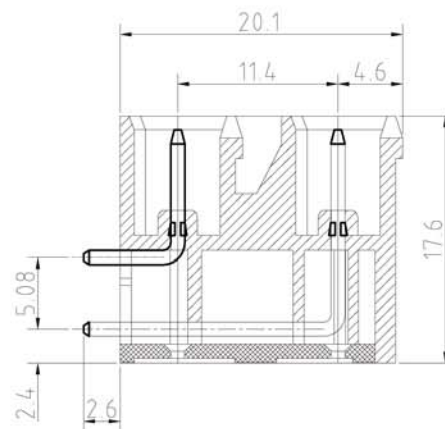

N=Number of contacts

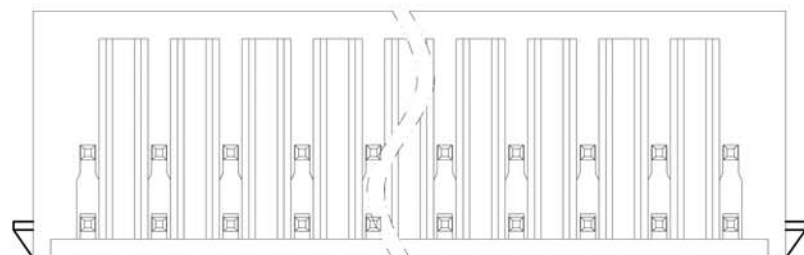

P.C.B. LAYOUT

SIGN	DESCRIPTION	DATE	APPROVER

Technical Data:

Material:

Solder Pin: Copper Alloy with Tin plated
Insulator body(housing): Polyamide
(Glass filled)(UL94V-0)

Electrical

Voltage rating: 300VAC
Current rating: 16A
Withstanding Voltage: AC 2500V(1min)

Mechanical:

Using temperature Range: -40°C to $+105^{\circ}\text{C}$
Soldering temperature: $+250^{\circ}\text{C}$, 5seconds Max.

Ordering Information:

F85-R-E XX-0 0 0 X 0 0 0 0

02 2Pin
To To
24 24Pin

5 Green
6 Blue
A Black

0 Open
1 Close
2 Screw nut
3 Square nut
4 W/Latch holder

0 180°
1 90°

WELINK

上海拓尔普电子科技有限公司

Welink International Co.,LTD.

TOLERANCE	APPROVED:	NAME:
X. ± 0.50	CHECKED:	F85-R Pitch 5.08mm
X.X ± 0.30	DRAWN: Ling Yu 2014,09,18	-Series-90°(W/Latch holder)
X.XX ± 0.20	UNITS: mm	PART NO: F85REXX014X0000
X° $\pm 1^{\circ}$	SCALE: 2.5 / 1	DWG NO: 9F85RE141A
	REV: A	
	PAGE: 1 / 1	